


SPEC DATA SHEET



- Excellent acoustical performance
- High-quality, economical, multi-purpose panels
- Class A fire rated
- Standard, designer or C.O.M. fabrics
- Various mounting options
- Custom sizes and shapes

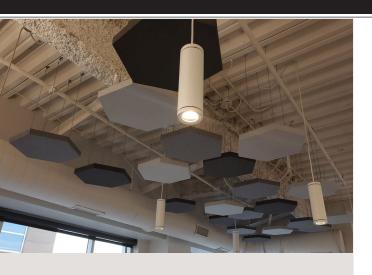

3800 American Blvd W. #1500 Bloomington, MN 55431

www.controlnoise.com

Email: help@controlnoise.com

Tel: 800.638.9355

# CEILING CLOUDS

**NetWell Noise Control's** Ceiling Clouds are perfect for the reduction of sound in ceiling areas. They are suspended horizontally with D-Rings (for panels up to 4'x4') or T-grid attachment for larger panels.

Ceiling Clouds are constructed with a 6-7# PCF rigid fiberglass absorber core. The edges are available in natural or chemically hardened and are available in 4 edge profiles.

## **FINISHES**

Guilford of Maine FR701 Style 2100 is the industry standard. Hundreds of approved decorative fabrics are also available from numerous manufacturers including, but not limited to: Guilford of Maine, Maharam, Design Tex and Knoll. Customers may also specify their own fabric, provided the material meets manufacturing requirements.

## **ACOUSTICAL**

**NRC** Rating

1/2" Thick ————	.5060
1" Thick ————	.80 – .90
2" Thick ————	1.05 - 1.25

# SIZING

All panels are custom made with sizing up to a maximum 4'x 10' and with thickness ranging from 1/2"-4' thick.

## MOUNTING OPTIONS

D-Rings, T-Grids or Rotofast Cloud Anchors

# **EDGE DETAILS**









Square

Miter

Bevel

Radius

## **SPECIFICATIONS**

Specifications can be downloaded from our website **www.controlnoise.com** or call us at **1.800.638.9355**