



- High NRC and STC ratings
- Excellent acoustical performance
- Class A fire rated
- Standard, designer or C.O.M fabric
- Custom sizing

# FabricBloc

## NOISE BARRIER WALL PANELS


The **FabricBloc** Noise Barrier Wall Panel is manufactured specifically as a double duty acoustical panel that offers both superior sound absorption and noise blocking performance. The FabricBloc Noise Barrier Wall Panels are the solution to speech privacy problems, providing clients the confidence that confidential conversations will not be overheard.

FabricBloc Panels are constructed using 1 lb. per square foot non-reinforced mass loaded vinyl barrier sandwiched between two layers of a 6-7# PCF rigid fiberglass board. Panels are available in 1-1/8" and 2-1/8" thickness, with a maximum size up to 4' x 10' and may be finished in custom, designer or C.O.M. fabric.

FabricBloc Panels can be installed with impaling clips and construction adhesive or Rotofast snap on anchors. Due to panel weight 2.5 lb per square foot, panels must be installed from floor to ceiling. Floor molding can be re-installed after installation of FabricBloc panels.

### APPLICATIONS:

- Corporate offices
- Conference rooms
- Doctor's offices
- Anywhere speech privacy is a concern

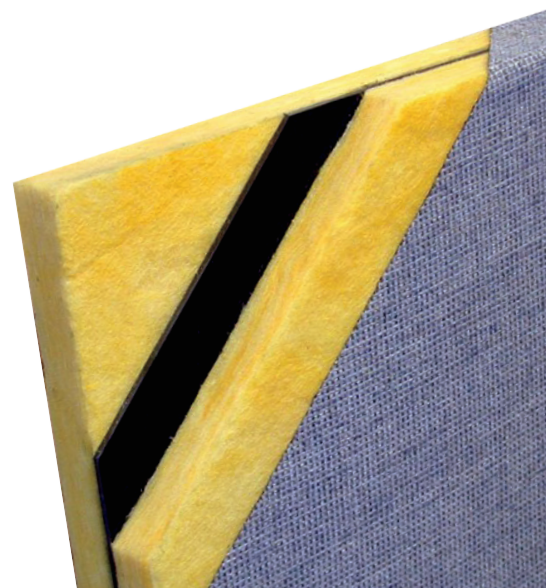



# FabricBloc

## NOISE BARRIER WALL PANELS

### SPEC DATA SHEET



#### FINISHES

Guilford of Maine FR701 Style 2100 is the industry standard. Hundreds of approved decorative fabrics are also available from numerous manufacturers including, but not limited to: Guilford of Maine, Maharam, Design Tex and Knoll. Customers may also specify their own fabric, provided the material meets manufacturing requirements.

#### ACOUSTICAL

##### NRC Rating

1-1/8" Thick \_\_\_\_\_ .80 – .90

2-1/8" Thick \_\_\_\_\_ .90 – 1.0

##### STC Rating

1-1/8" Thick \_\_\_\_\_ 29 (estimate)

2-1/8" Thick \_\_\_\_\_ 30 (estimate)

#### FIRE RATING

All components shall have a Class A fire rating per ASTM E-84

#### SPECIFICATIONS

Specifications can be downloaded from our website

**www.controlnoise.com** or call us at **1.800.638.9355**

#### MOUNTING OPTIONS



Impaling Clips




Rotofast Anchors




Adhesive

#### EDGE DETAILS




Square



Miter



Bevel



Radius



3800 American Blvd. W #1500  
Bloomington, MN 55431

www.controlnoise.com

Email: help@controlnoise.com

Tel: 800.638.9355