

FloorFighter 6mm Acoustical Floor Underlayment

FloorFighter

FloorFighter floor underlayment is made from recycled rubber tires. FloorFighter 6 is used under tile/marble, carpet and wood flooring. **FloorFighter** is excellent for use in lightweight wood frame construction due to its weight & mass. **FloorFighter** 6 is 1/4" thick and comes in rolls 4' x 25' (100 sq ft rolls)



Applications:

Typical uses include; apartments, homes, condos, schools, hospitals and any areas where reduction from structural impact noise through the floor to ceiling assembly is required. **FloorFighter** underlayment can be installed over concrete, gypsum topping and structural sound plywood sub floors.

- 92% recycled content, qualifies for up to 5 Leed Points
- IIC rating 50+
- Easy to install, 4' x 25' rolls
- Sound control underlay for tile, stone, & Hardwood

Product Data:

Description Made from 92% recycled SBR (Styrene-Butadiene Rubber) tire rubber


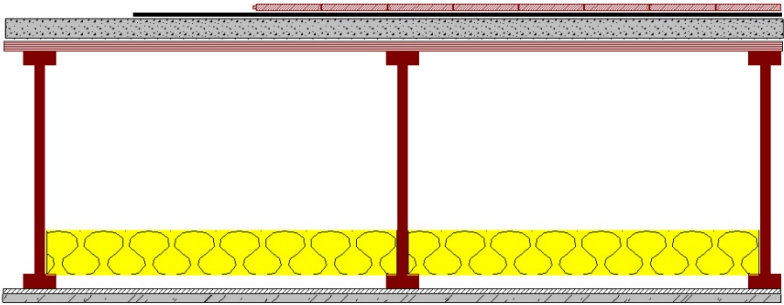
Nominal thickness	6mm
Density (ASTM D-792)	43 lbs cubic ft
Standard width	48" wide
Roll length	25' long
Weight	1.0 lb psf
Hardness A Shore-Durometer	40-55



Acoustics performance on back page

FloorFighter

FloorFighter 6mm Acoustical Testing

Description	Detail	IIC / FIC Rating
<p>6mm FloorFighter</p> <p>Floated Engineered hardwood over 6mm FloorFighter over 6" slab</p>		<p>Δ 22</p>
<p>6mm FloorFighter</p> <p>Floated Engineered hardwood over 6mm FloorFighter over 1 1/2" gypsum topping over 16" TJI – 24 centers RC1 channel – 1 layer 5/8" GWB</p>		<p>IIC 57</p>