


#### SPEC DATA SHEET



- Standard size 2'x2' or 2'x4'
- Custom sizes available
- 1" or 2" thickness
- Multiple finish options
- Excellent acoustical values
- Offered with a 1# psf vinyl noise barrier for high STC requirements (Granite Tile)

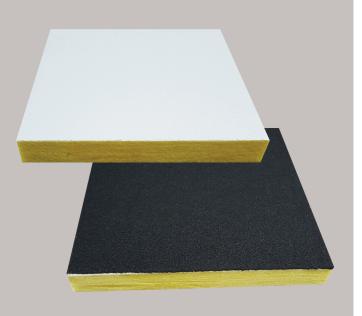

www.controlnoise.com Email: help@controlnoise.com Tel: 800.638.9355

# Pebble & Granite ACOUSTICAL CEILING TILES

Netwell Ceiling tiles are offered as a sound absorbing or combination sound absorbing+sound blocking tile.

**Pebble Ceiling Tiles** come in several finish options attached to a 1" or 2" thick rigid fiberglass board and have excellent sound absorption (NRC) ratings.

**Granite Ceiling Tiles** take the standard Pebble Tile and add a 1# per square foot foil backed vinyl noise barrier to the upper side of the tile for high sound absorption (NRC) and high sound blocking (STC) requirements.

#### FINISHES

- 2 mil white pebble grain vinyl facing
- Black matte facing
- Fabric
- Paintable

#### ACOUSTICAL

NRC Rating

1" Thick \_\_\_\_\_\_\_.85 2" Thick \_\_\_\_\_\_\_1.15

Granite Tile ———— STC 26

# SUBSTRATE

6-7# PCF rigid fiberglass core \*Granite Tile adds a 1# psf vinyl noise barrier w/ foil backing

# EDGE DETAIL

Square

#### WEIGHTS

Pebble Tile .6 lbs/SqFt Granite Tile 1.6 lbs/SqFt

# MOUNTING OPTIONS

Grid supplied by others