


SOUND SCREENS

PORTABLE NOISE BARRIERS

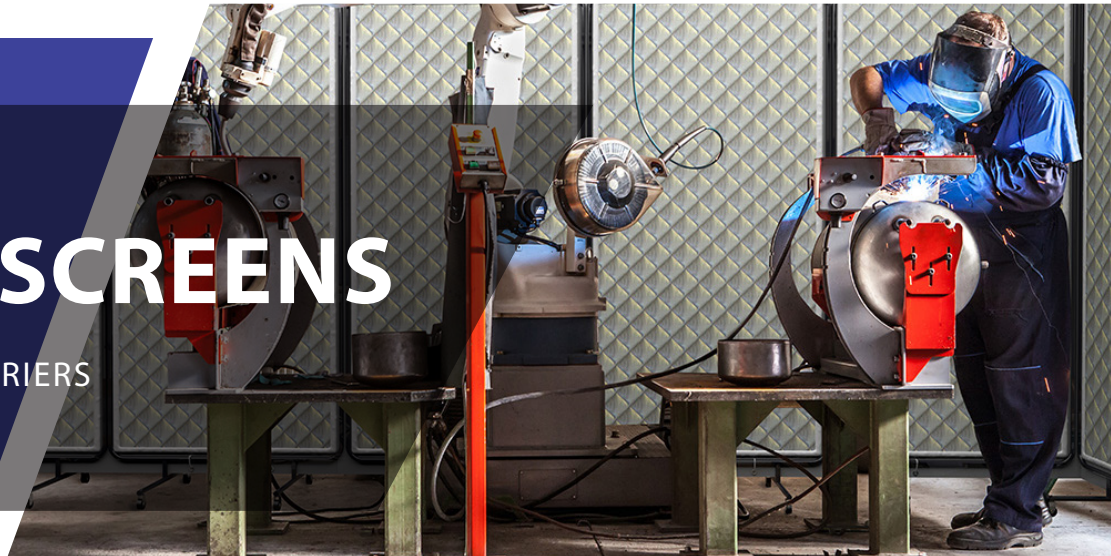

QUICKLY AND EASILY FORM PARTIAL ACOUSTIC ENCLOSURES

Sound Screens by NetWell are portable acoustic screens that can be used individually or in groups to form partial noise enclosures, offering complete mobility and maximum accessibility. They consist of a rugged powder-coated tubular steel frame combined with our high-performance noise barrier/sound absorption curtain panels and heavy duty casters. Multiple units join together with velcro tabs to form any configuration required.



controlnoise.com/soundscreens

FEATURES:

- Standard size 4' x 8'
- Completely mobile for maximum accessibility
- Utilizes high-performance acoustical curtain panels
- Collapsible framing allows for cost-effective and quick shipping methods

APPLICATIONS:

Typically used to reduce the reflection of sound waves or reverberant noise energy within a piece of equipment, a room, or a building.

ACOUSTICAL PERFORMANCE

Sound Transmission Loss: 1/3 Octave Sound Absorption Coefficients at the Octave Band Frequencies							
Frequency (Hz)	125	250	500	1K	2K	4K	STC
QB-2	6	11	15	20	25	32	19
QBV-1	11	16	24	30	39	43	27
QBV-2	13	20	29	40	50	40	32
QBS-1	12	16	27	40	44	47	29

Per ASTM E 90

PRODUCT SPECIFICATIONS

DESCRIPTIONS

QB-2: 2" thick vinyl faced quilted fiberglass absorber

QBV-1: 1" thick vinyl faced quilted fiberglass absorber / bonded to a 1 lb-psf reinforced loaded vinyl noise barrier

QBV-2: 2" thick vinyl faced quilted fiberglass absorber / bonded to a 1 lb-psf reinforced loaded vinyl noise barrier

QBS-1: 1" thick vinyl faced quilted fiberglass absorber on both sides of a 1 lb-psf loaded vinyl noise barrier septum




SIZES

Standard panel size is 48" x 96"

OPTIONS

- Stationary T-stand
- Caster wheels

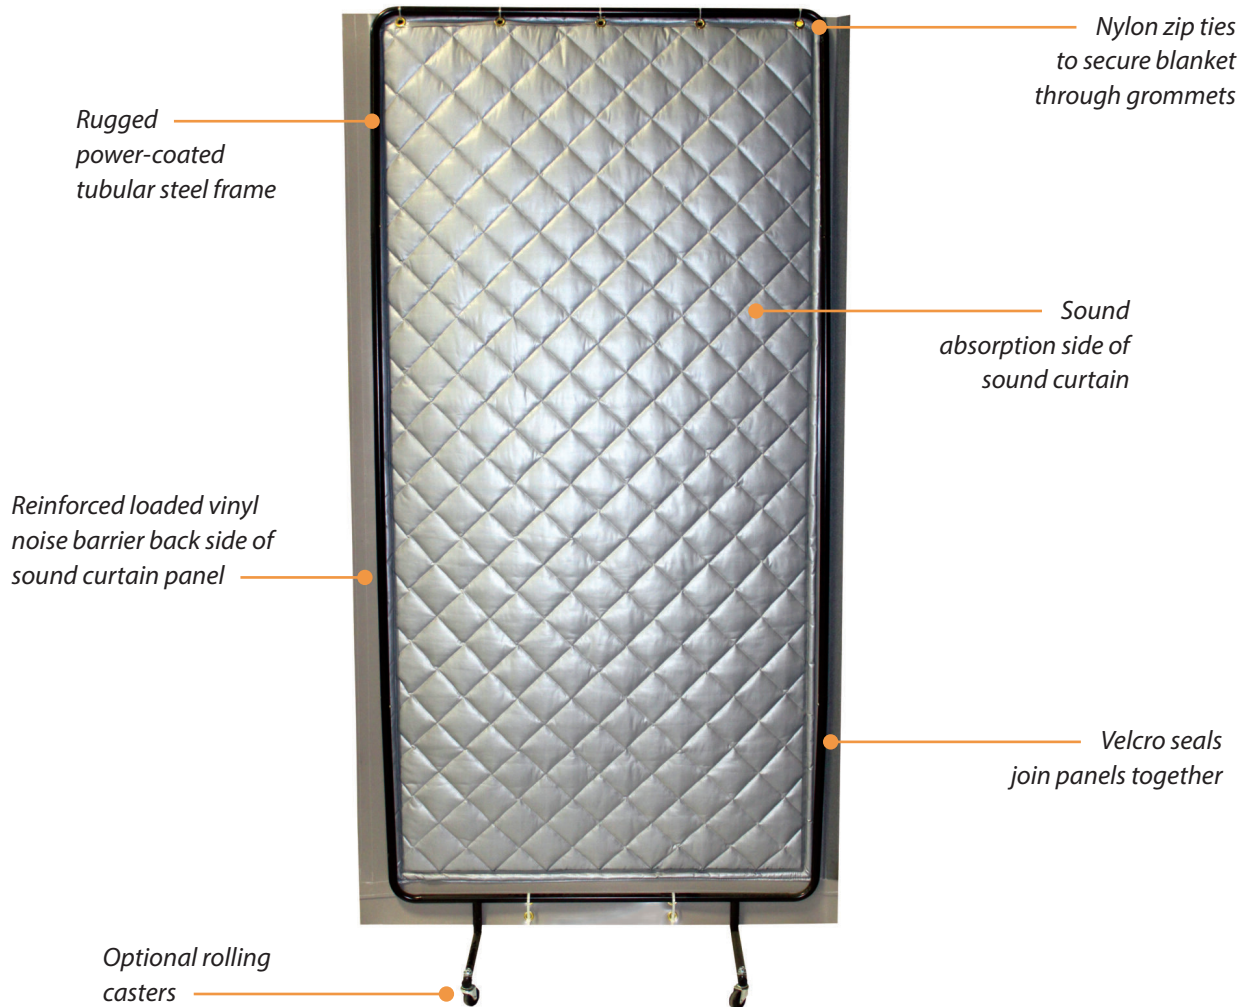

HARDWARE AND INSTALLATION

SOUND SCREEN ACCESSORIES:

- 7 zip ties to secure panel through grommets on top and bottom of the frame (included)
- 4 snap-in rolling casters for ease of transport around a project site (optional)

